

SPECIFICATION:

JOSAM 37810 SERIES COATED CAST IRON FLOOR DRAIN, TWO-PIECE MEDIUM-DEEP BODY, PERFORATED STAINLESS STEEL EXTENSION, NON-PUNCTURING FLASHING FRAME, WEEPHOLES, BOTTOM OUTLET, SQUARE TOP, HEAVY DUTY LOOSE-SET GRATE AND REMOVABLE SEDIMENT BUCKET.

FLOOR DRAIN

MEDIUM SUMP, 12" HEAVY DUTY TOP PERFORATED SS EXTENSION

SERIES **37810-IRMA**

SLOT WIDTH (STD, -19, -20): 3/8" (METSQ)

GRATE FREE AREA: 54 IN² [311]

11.56 S.Q. [294]

2 1/2" □ [63]

K = (4" STD.)


-IRMA
PERF. SS EXTENSION
STAGGERED OPENINGS
40% OPEN

X = 5 3/8"
Y = 4 7/8" ☒
Z = 5 1/8"
T = 3 3/4"

□ ADD 1/4" WHEN FURNISHED WITH BRONZE OR NIKALOY TOP

☒ GASKET ON -Y CONNECTION CONFORMS WITH ASTM-C564

PIPE SIZE Ø
Ø 15 1/4" [387]

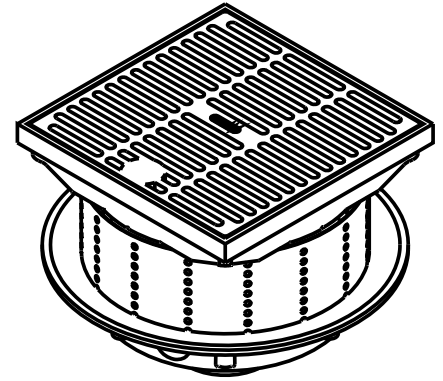

	2"	PIPE SIZE
	3"	PIPE SIZE
	4"	PIPE SIZE
	5"	PIPE SIZE
	6"	PIPE SIZE
	-X	INSIDE CAULK OUTLET
	-Y ☒	PUSH-ON
	-Z	NO-HUB
	-T	THREADED OUTLET
	-AE	LEVELEZE ADJUSTABLE EXTENSION
	-4*	SECONDARY FLASHING CLAMP
	-7	DUCTILE IRON GRATE
	-14	HINGED GRATE

	-VP	SECURED GRATE, VANDAL-PROOF SCREWS
	-18	HINGED GRATE W/ LATCHING DEVICE
	-19	C.I. UNDERGRATE W/ SATIN NIKALOY TOP
	-20	C.I. UNDERGRATE W/ SATIN BRONZE TOP
	-39	SOLID COVER
	-49	3/4" PRIMER TAP
	-50	1/2" PRIMER TAP
	-66	NO-HUB SIDE OUTLET
	-70	LESS BUCKET
	-84	STAINLESS STEEL MESH BUCKET LINER
	-88	SUPPLEMENTARY STRAINER
	-92	GALVANIZED CAST IRON PARTS
	-ARE	ACID RESISTANT EPOXY COATING

* AVAILABLE WITH -AE ONLY

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 08/16/24 BLK

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



MICHIGAN CITY, INDIANA

NOTES